



PROVISIONAL

ISUZU N35.150 (W)

3.5T GVW

4x2 rigid twin rear wheels. Chassis and wide cab

EURO VI

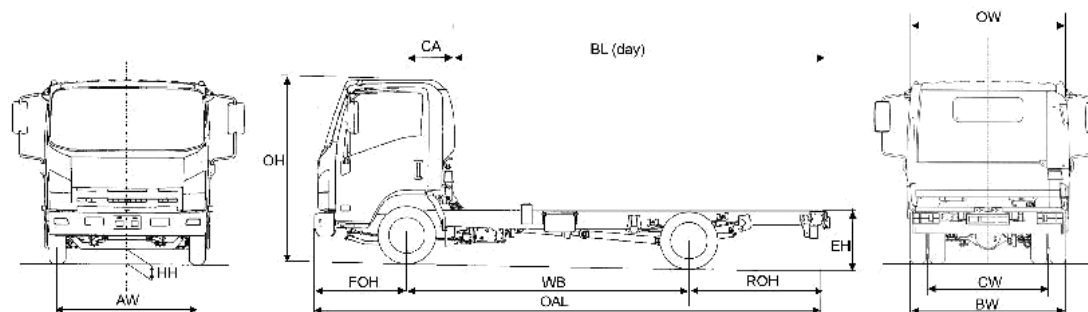

Standard vehicle plated weights (kg)

GVW	3500
GTW	7000

Axle design weights (kg)

Front	2100
Rear	2435

Weights (kg)

Cab type		day
Wheelbase	WB	3395
Vehicle Mass Unladen	Front	1560
	Rear	695
Total		2255
GVW		3500
Max. Permissible Trailer Weight		3500
Body & Payload Allowance		1245

Dimensions (mm)

Overall Length	OAL	6100
Overhang - Front	FOH	1110
Overhang - Rear	ROH	1595
Cab Gap	CB	157
C/L Front Axle to Rear of Cab	CA	573
Recommended Body Length	BL	4267
Chassis Frame Width		750
Recommended Body Width		2176
Recommended Maximum Body Width		2345
Cab Width	OW	2040
Overall Height (Unladen)	OH	2225
Chassis Height (Unladen)	EH	720
Minimum Road Clearance	HH	165
Track - Front	AW	1680
Track - Rear	CW	1485
Rear Axle Width	BW	1914

1. Unladen weights include driver 75kg, 90% fuel. (Tolerance $\pm 3\%$).

2. Body lengths are given as a guide only. Bodybuilders are responsible for ensuring all legal requirements are met.

3. Maximum body lengths are calculated to remain within the maximum permitted overhang of 60% of the wheelbase. Cab gaps may vary.

4. Isuzu Ireland shall have no liability whatsoever should the information supplied have incorrect data, descriptions or illustrations.


PROVISIONAL

ISUZU N35.150 (W)

3.5T GVW

4x2 rigid twin rear wheels. Chassis and wide cab

EURO VI



Mechanical Specification (standard equipment)

Engine 4JJ1TC

Isuzu turbo intercooled DOHC 4 cylinder diesel (Euro VI)

Bore: 95.4mm

Stroke: 104.9mm

Capacity: 2999cc

Max Power: 110kW

(150 PS) at 2800rpm

Max Torque: 375Nm

between 1600-

2800rpm

Injection

Type: Common rail

Euro VI Compliance:

EGR (Exhaust Gas

Recirculation) with DPD

(Diesel Particulate

Diffuser), SCR Adblue

and OBD

Fuel Tank

Capacity: 90 litres

Transmission

5-speed synchromesh

MY5T overdrive

Ratios: 1st 5.315:1

2nd 5.315:1

3rd 1.655:1

4th 1.000:1

5th 0.721:1

reverse 5.068:1

Rear Axle Ratio: 3.909:1

Tyres: 205/75 R16C radial

Wheels: 5.50J x 16, 5-stud

Cab Exterior

Aerodynamic Isuzu

Hexapod design white

all steel

Manual tilt to 45 deg

Laminated windshield

Plastic resin non-slip

entry steps

90 deg. opening

doors Zinc galvanised

frame structure

2 flush mounted halogen

headlamps with side

mounted indicators

Front tyre mudguards

with spray suppression

Steel reinforced composite

front bumper with fog and

daytime running lamps

Chrome radiator grille

Keyless door entry and

immobiliser

Steel rear bumper

Frame

Ladder type channel section straight side rails, riveted upper flanges

Cooling

Radiator: Tube and fin type

with fan and viscous clutch

Frame mounted fuel cooler

Clutch

300mm diaphragm type

with hydraulic actuation

Cab Interior

Flame resistant

interior trim

Vinyl floor matting Pillar

mounted entrance grab

handles both sides SRS

airbags driver and

passenger

Seats (all cloth)

Driver's fully adjustable

(suspension) seat with

head restraint

Dual passenger seat

with folding back

Driver and outer

passenger retractable

diagonal seat belts,

with pre-tensioner

Centre seat lap belt

Vision

Large foldable

door mirrors

Interior rear view mirror

on collapsible mounting

Driver and passenger

sun visors

Deep cut side windows

to reduce blind spots

Electric windows with

driver control and lock

Heating & Ventilation

4-speed blower

Multiple cab vents

Axles

Front: Reverse

Elliott I-Beam

Rear: Banjo fully floating

Suspension

Front: Semi elliptical alloy

steel leaf springs with

hydraulic shock absorbers

and anti roll bar

Rear: Semi elliptical alloy

steel leaf springs with

hydraulic double acting

telescopic shock absorbers

and anti roll bar

Steering

Recirculating ball type

with full integral hydraulic

power assistance

Tilt and telescopic

steering column

Brakes

System: ABS divided

hydraulic, vacuum servo

assisted with electronic

brake distribution, anti

slip regulation and

electronic vehicle stability

control Front: 293mm

ventilated discs with

asbestos-free pads

Rear: 275mm

ventilated discs with

asbestos-free pads

Park: Mechanical drum

brake rear of transmission

Instruments

Speedometer with

odometer and trip

Rev counter

Fuel gauge

Engine coolant

temperature

Multi information display

provides data on

servicing, emissions and

fuel economy

Switches & Electrical

Steering column

mounted combination

switch for indicators,

headlamps (high beam),

side and rear fog lights

Wiper and washer (2-

speed and intermittent)

Steering wheel horn

Engine idle control

Hazard lights

Headlamp levelling

Interior light

Key operation for quick

cold start, start and

stop Engine quick

warm-up Cigarette

lighter Central locking

Reverse warning

DPD engage

Front fog lights

EV SC off

ASR off

Exhaust brake

Heater stage

Warning/Indicator Lamps

Battery charge

Oil pressure

Low fuel

Low plug operation

High beam and

indicators Parking brake

on Fuel/water separator

Check engine

DPD operation

Engine over

heat Adblue

level EVSC

ABS

SRS/airbag

Exhaust brake operation

Front and rear fog

SVS

Seat belt

Brake system

Brake vacuum loss

Tool Kit

Jack, with a small

selection of hand tools

Radio

DAB Radio / CD

Player package

Storage Space

Compartment box

Centre console tray

Door pockets

Centre fascia pocket

Pop out type cup holder

Overhead roof shelves

Storage bin (behind

seats) Card holder

Ancillaries

Starter: Reduction

type 24 V – 4.0kW


Alternator: 24 V – 50

Amp Quick Start: 4 glow

plugs on start relay

Battery: 2 x 12 V – 75

AH (maintenance free)



The following optional items are available:

- Isuzu Branded Mats
- Satellite Navigation
- Reversing Aids
- Digital Tachograph
- Road Speed Limiter
- PTO Switch
- Telematics
- Aerodynamic Body Kits

For further information please contact your local dealer, ring us directly on

(01) 4194500

or visit our website

www.isuzu-ireland.com

Isuzu Ireland,

Naas Road

Dublin 12

ISUZU

