
ISUZU N75.150

7.5T GVW

(Manual transmission) 4x2 rigid

EURO VI

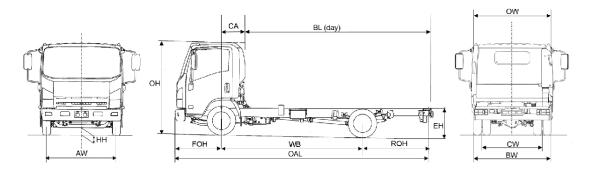

Weights (kg)					
Cab type		day	day	day	
Wheelbase	WB	3365	3815	4475	
Vehicle Mass Unladen	Front	1665	1695	1765	
	Rear	955	945	930	
Total		2620	2640	2695	
GVW		7500	7500	7500	
Max. Permissible Trailer Weight		3500	3500	3500	
Body & Payload Allowance		4880	4860	4805	

Dimensions (mm)					
Overall Length	OAL	5985	6635	7815	
Overhang - Front	FOH	1110	1110	1110	
Overhang - Rear	ROH	1510	1710	2230	
Cab Gap	СВ	170	170	170	
C/L Front Axle to Rear of Cab	CA	550	550	550	
Recommended Body Length	BL	4267	4876	6096	
Chassis Frame Width		850	850	850	
Recommended Body Width		2286	2286	2286	
Recommended Maximum Body Width		2387 [†]	2387 [†]	2387⁺	
Cab Width	OW	2040	2040	2040	
Overall Height (Unladen)	ОН	2265	2265	2265	
Chassis Height (Unladen)	EH	805	800	780	
Minimum Road Clearance	HH	190	190	190	
Track - Front	AW	1680	1680	1680	
Track - Rear	CW	1650	1650	1650	
Rear Axle Width	BW	2129	2129	2129	

Wide mirror arms apply at extra cost.



Standard vehicle plated weights (kg)

GVW	7500
GTW	8250
GTW Optional	11000

Axle design weights (kg)

Front	3100
Rear	6000



^{1.} Unladen weights excludes driver, fuel, Ad Blue. Includes spare wheel + carrier (Tolerance \pm 3%).

^{2.} Bodyl engths are given as a guide only. Bodybuilders are responsible for ensuring all legal requirements are met.
3. Maximum bodyl engths are calculated to remain within the maximum permitted overhang of 60% of the wheelbase. Cab gaps may vary.
4. Isuzu Ir eland. shall have no liability whatsoever should the information supplied have incorrect data, descriptions or illustrations.

ISUZU N75.150

7.5T GVW

(Manual transmission) 4x2 rigid

EURO VI

Mechanical Specification (standard equipment)

Engine 4JJ1TC

Isuzu turbo intercooled 4 cylinder diesel DOHC Euro VI

Bore: 95.4mm Stroke: 104.9mm Capacity: 2999cc Max Power: 110kW (150 PS) at 2800rpm Max Torque: 375Nm betw een 1600-2800rpm Injection Type: Common rail

Euro VI Compliance: EGR-(Exhaust Gas Recirculation) with DPD (Diesel Particulate Diffuser) SCR Adblue and

Fuel Tank

Capacity: 92 litres Adblue: 16 litres

Transmission

6 speed synchromesh manual MZZ6S overdrive

Ratios:	1st	5.979
	2nd	3.434
	3rd	1.862
	4th	1.297
	5th	1.000
	6th	0.759
	reverse	5.701
Rear Axle Ratio:		5.57:1

Tyres: 215/75 R17.5 radial Wheels: 6.00J x 17.5, 6-stud

Cab Exterior

Aerodynamic Isuzu Hexapod design white all-stee with roof outline markers Manual tilt to 45 deg.

Chrome radiator grille Laminated windscreen Plastic resin non-slip entry steps

90 deg. opening doors Zinc galvanised frame structure

Steel reinforced composite front bumper with fog and daytime running lamps 2 halogen head lamps with indicators

Front mudguards with spray suppression Keyless door entry and

immobiliser

Aluminium rear bumper

Frame

Parallel ladder type channel section straight side rails, rivet less upper flange

Cooling

Radiator: Tube and fin type with fan and viscous clutch Frame mounted fuel cooler

325mm diaphragm type with hydraulic actuation

Cab Interior

Flame-resistant interior Vinyl floor matting Pillar mounted entrance grab handles both sides SRS airbags driver and passenger

Seats (all cloth)

Driver's fully adjustable suspension seat with head restraint (optional on crew cab)

Dual passenger seat, folding back centre with

Driver and outer passenger retractable diagonal seat belts, with pre-tensioner Centre seat lap belt 4-seat passenger (crew cab) with lap belts

Vision

Large foldable, heated mirrors Interior rear view mirror

on collapsible mounting Driver and passenger sun

Deep cut side windows to reduce blind spots Electric windows with driver control and lock

Heating & Ventilation

4-speed blow er Multiple cab vents

Axles

Front: Reverse Elliott

I-Beam

Rear: Banjo fully floating

Suspension

Front: Semi-elliptical alloy

steel leaf springs with hydraulic shock absorbers and anti-roll bar Rear: Semi-elliptical alloy steel leaf springs with hydraulic shock absorbers and anti-roll bar

Steering

Recirculating ball type with full integral hydraulic pow er assistance Tilt and telescopic steering column

Brakes

System: ABS Power assisted divided hydraulic. Vacuum Servo with electronic brake distribution and anti slip regulation, Electronic Vehicle Stability Control Front: 310mm ventilated discs with asbestos free pads

Rear: 310mm ventilated discs with asbestos free

pads

Park: Mechanical drum brake rear of transmission

Instruments

Speedometer with odometer & trip Rev counter Fuel gauge Engine coolant temperature Multi information display provides information on servicing, emissions and fuel economy Digital Tachograph

Switches & Electrical Steering column mounted combination switch for indicators, head lamps (high beam), front and rear fog lights Wiper and washer (2-speed and intermittent) Steering wheel horn Engine idle control Hazard lights Head lamp levelling Interior light Heated mirror Key operation for quick cold start, start and stop Engine quick warm-up Cigarette lighter

Central locking

Reverse warning DPD engage EV SC off ASR off Ex haust brake Heater stage Electronic vehicle speed limiter set at 56mph (90kph)

Warning/Indicator Lamps

Battery charge Oil pressure Low fuel Glow plug operation High beam and indicators Parking brake on Fuel/w ater separator Check engine DPD operation Engine over heat Adblue level **EVSC** ABS Exhaust brake operation Front and rear fog SVS Seat belt Brake system SRS air bag

Tool Kit

Jack, with a small selection of hand tools

Brake vacuum loss

Radio

DAB Radio/CD Player package

Storage Space

Compartment box Centre console tray Door nockets Overhead roof shelf Storage bin (behind seats) Card holder

Ancillaries Starter: Reduction type 24V - 4.0kW Alternator: 24 V - 80 A mp Quick Start: 4 glow plugs on start relay Battery: 2 x 12 V 75 AH (maintenance free)

F 865 8·J 8-3-3 50 500

The following optional items are available:

- Isuzu Branded Mats
- · Aerodynamic Body Kits
- Satellite Navigation
- Reversing Aids • PTO Sw itch
- Telematics

For further information please contact your local dealer, ring us directly on

(01) 4194500 or visit our website

www.isuzu-ireland.com

Isuzu Ireland, Naas Road Dublin 12.

